

RANDON LOW BED SEMI-TRAILER

25t 35t 45t



FLAT - 35t



LOWERED - 45t



FLAT - 45t



LOWERED - 35t



LOWERED - 25t



FLAT - 25t

The products on the pictures are equipped with optional items.

APPLICATION:

Adequate for indivisible loads with maximum weight of 35.000 kg for 02 axels models and 45.000 kg for 03 axels models.

RANDON
IMPLEMENTOS

CHASSIS

- Stamped suspension, Suspensys Brand, 02 or 03 axles;
- Tubular axels, Suspensys Brand, with 13 tons capacity each one;
- Structure built in "I" profile, flat or lowered, with "U" profile integral cross members;
- Telescopic landing gear;
- Flanged king-pin Ø2" (50,8 mm Jost Brand);
- Rubber mud flaps;
- Master/Rockwell Q-Plus air brakes Ø16.1/2" x 8" with two lines: service and emergency;
- Electrical installation according international standards;
- Coupling to tractor unit 4x2 / 6x2 / 6x4;
- Spring brake chambers on the two rear axels for 03 axels semi-trailers and on the last axels for 02 axels semi-trailers.

LOAD PLATFORM

- Hardwood floor with 50 mm thick;
- Rear support for access ramps;
- Antiskid rear a little bit inclined to make easy the load and unload process;
- Rings for tying the load.

ACCESSORIES


- Electrical installation with back light;
- Metallic tool box;
- Spare carrier for two tires, on the gooseneck;
- Rear bumper.

PAINTING

- Final painting in one color.

OPTIONALS

- Flanged king-pin Ø3.1/2" (88,9 mm Jost);
- Spring actuated mechanical ramps on the rear;
- Mechanical ramps on the rear (without springs);
- Manual hydraulic ramps;
- Hydraulic ramps achieved by the tractor unit;
- Metallic cover plate over the wheels (bolted or welded);
- Available platform width: 2,600 / 3,000 mm.

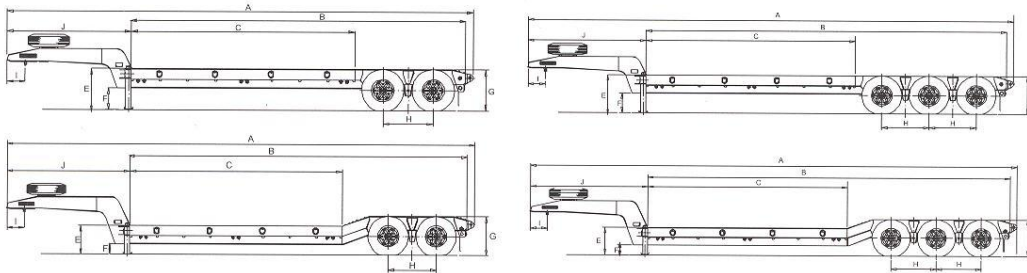

quote	description	dimensions						unit
		2 axles 25 t		2 axles 35 t		3 axles 45 t		
		lowered	flat	lowered	flat	lowered	flat	
A	Overall length (without ramps)	13,300	12,650	13,200	12,650	14,550	14,000	mm
B	Platform load overall length	9,560	9,050	9,480	9,050	10,830	10,400	mm
C	Platform load useful length	6,000		6,000		6,000		mm
D	Overall width	2,800		2,800		2,800		mm
E	Height from ground to platform	840	1,117	860	1,128	860	1,135	mm
F	Empty space between ground and platform	335	603	335	603	335	603	mm
G	Rear platform overall height	1,117		1,128		1,135		mm
H	Wheel base	1,350		1,350		1,350		mm
I	King pin location	510		510		510		mm
J	Gooseneck overall length	3,538	3,408	3,530	3,400	3,530	3,400	mm
K	Tare with tires and 1 spare carrier	6,350	6,150	7,700	7,500	9,900	9,700	kg
L	Payload capacity	25,000		35,000		45,000		kg
M	Rings	8.00 x 22"		8.00 x 22"		8.00 x 22"		inch
N	Tires	11.00 x 22"		11.00 x 22"		11.00 x 22"		inch

RANDON S.A. IMPLEMENTOS E PARTICIPAÇÕES
 Av. Abramo Randon, 770
 95055-010 - Caxias do Sul - RS - Brazil
www.randon.com.br - e-mail: export@randon.com.br

Caxias do Sul - RS - Tel.: PABX 55 54 3209.2000 - Fax: 55 54 3209.2077



Dealer

Randon products are under continuous development, so, technical specification may be changed without previous notice.